

MS950CG Neorest® 500

■ SPECIFICATIONS

Water Use: 1.6 Gpf/6.0 Lpf with alternate 1.2 Gpf/4.5 Lpf
 Flush System: Cyclone Siphon Jet
 Min. Water Pressure: 20 psi
 Trap Diameter: 2-1/8" (54 mm)
 Rough In: 12" rough in
 Trap Seal: 2-7/16" (62 mm)

Warranty: Three Year Limited Warranty

Material: Bowl: Vitreous china
 Seat and cover: Plastic

Shipping Weight: **MS950CG**
 90 lbs.

Shipping Dimensions: **MS950CG**
 21" x 31" x 34"


Colors: Standard Cotton #01

Colors: Optional Colonial White #11
 Sedona Beige #12

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M, ASSE 1037, ASSE 112.4.2, CAN/USA B125, and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/UPC, City of Los Angeles, State of Massachusetts, and others.

These dimensions and specifications are subject to change without notice.

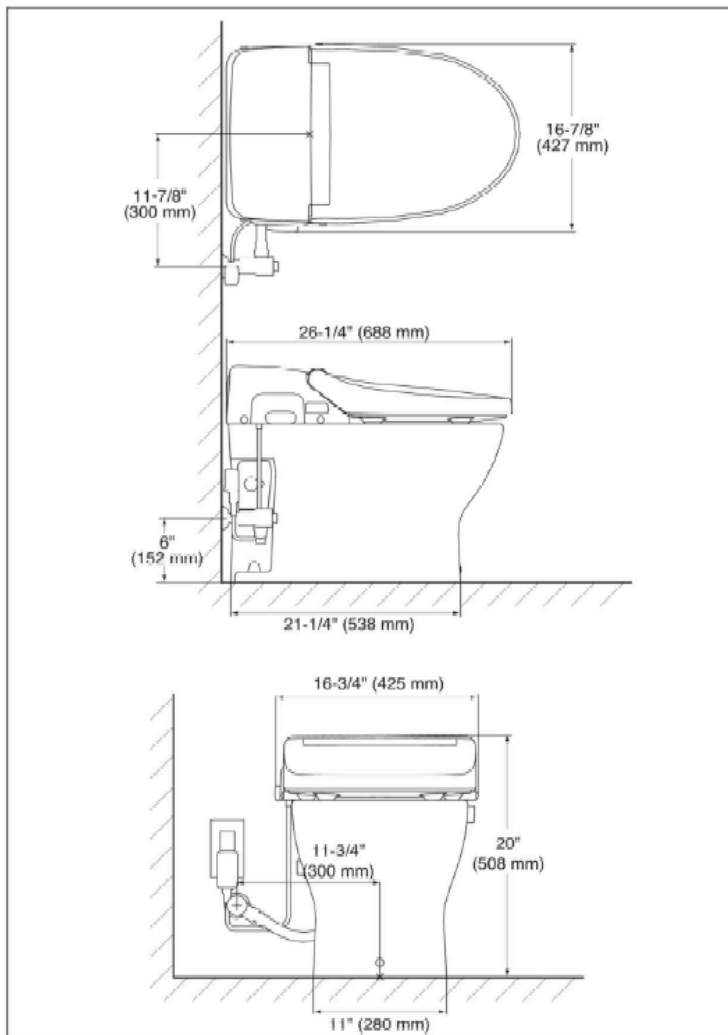

Neorest 500 MS950CG

Power Rating 120V AC, 60 Hz, 1281W
Power Cord Maximum length: 3 ft (914 mm)
Water Feature Adjustable Water Flow Rate
 Rear washing: from 9 to 14.5 oz/min.
 Soft washing: from 9 to 14.5 oz/min.
 Front washing: from 9.5 to 14.5 oz/min.
 Temperature of Washing Spray
 Minimum: 86° F/30° C
 Maximum: 104° F/40° C
 Safety Features: Temperature fuse, Bi-metal sensor (auto reset), and Float switch (prevent boil)
Drying Feature Air Temperature:
 High: About 138°F/59°C
 Medium: About 122°F/50°C
 Low: About 104°F/40°C
 Capacity of Air: 8.4 ft³/min
 Safety Feature: Temperature Fuse

Seat Warming Feature Surface Temperature:
 Minimum: 79° F/26° C
 Maximum: 97° F/36° C
 Seat Heater Capacity: 50W
 Safety Feature: Thermal fuse

Air Purifying Feature Method: 0: Deodorizer
 Air Volume: 5.5 ft³/min

Water Supply Pressure Minimum: 20 psi
 Maximum: 80 psi

Ambient Temperature Range -32°F/0°C to 104°F/63°C

Size 17" x 26.3" x 20"

Weight Net: 81.5 lbs.

Listings/Approval



Colors: Standard #01 Cotton
 Optional #11 Colonial White
 #12 Sedona Beige

Specifications may change without notice.

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 • Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 09/05 #A10077

PRINTED ON RECYCLED PAPER

REV. 09/05

